



Patent
Attorney's Docket No. 040010-906

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)
Arne SIMONSSON et al.) Group Art Unit: 2681
Application No.: 09/749,920) Examiner: Unassigned
Filed: December 29, 2000)
For: METHOD AND APPARATUS)
RELATING TO RADIO)
COMMUNICATION)

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Swedish Patent Application No. 9904859-7

Filed: December 30, 1999

In support of this claim, enclosed is a certified copy of said prior foreign application. Said
prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of
the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: April 25, 2001

By:

Steven M. duBois
Registration No. 35,023

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen



Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm SE
Applicant (s)

Patentansökningsnummer 9904859-7
Patent application number

(86) Ingivningsdatum 1999-12-30
Date of filing

Stockholm, 2000-11-15

För Patent- och registreringsverket
For the Patent- and Registration Office

Anita Södervall

Avgift
Fee 170:-

PRU99-12-30

METHOD AND APPARATUS RELATING TO RADIO COMMUNICATION

This Page Blank (uspto)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222

TECHNICAL FIELD

The present invention pertains to the field of methods and apparatuses relating to radio communication; and in particular to the part of this field that concerns cellular radio communication.

BACKGROUND AND RELATED ART

A conventional public land mobile telephone network (PLMN) - i.e. cellular radio communication system - include a land system and one or more radio terminals, e.g. mobile (or fixed) cellular radio phones, cellular communicators or computers having associated cellular radio communication equipment. The land system typically includes a switching system, which is connected to one or more radio communication nodes, commonly referred to as radio base stations (RBS). The switching system includes one or more switching nodes, for example mobile services switching centres (MSC), which are arranged for providing the necessary switching functions in order for information (e.g. coded speech or data) to be transferred in a desired manner between the radio base stations. The switching system includes registers containing, among other things, information relating to subscriptions in the PLMN. The switching system normally includes also one or more gateway nodes for connecting the PLMN to other communication networks, e.g. public switched telephone networks (PSTN), data networks, Internet et cetera. Each radio base station serves at least one geographical area known as a cell. The radio base stations are arranged for providing radio communication services (e.g. speech communication or data communication) to radio terminals that are within the cell(s). The radio terminals communicate with the radio base stations via a predetermined radio interface. The land system is arranged for allowing radio terminals to communicate, via the radio base stations and the switching system, with, for example, other radio terminals in the PLMN, with telephones connected to a PSTN or with computers connected to a data network or internet.

In order to organise radio channels for the radio communications between the radio terminals and the radio base stations, a number of multiple access methods have been developed. Today the most widely used access methods are FDMA (Frequency Division
5 Multiple Access), TDMA (Time Division Multiple Access) and CDMA (Code Division Multiple Access).

In FDMA, an available radio frequency range is divided into a number of (narrow) separated frequency bands. During FDMA communications between a radio terminal and a radio base
10 station, a selected first frequency band is used for uplink communication (radio terminal to radio base station) and a selected second frequency band is used for downlink communication (radio base station to radio terminal). The first frequency band and the second frequency band are dedicated for
15 the communication between the radio terminal and the radio base station and are not at the same time used for communications between the radio base station and other radio terminals in the cell(s) associated with the radio base station. FDMA is used foremost in older analogue PLMN systems, for example in the NMT
20 system (Nordic Mobile Telephone system) and in the AMPS system (Advanced Mobile Phone System).

In TDMA, an available frequency range is normally also divided into a number of separated frequency bands. During TDMA communications between a radio terminal and a radio base
25 station, a selected first frequency band is used for uplink communication and a selected second frequency band is used for downlink communication. However, the radio terminal is not allowed to use the first frequency band for uplink communication all the time, but only during predetermined time intervals - so
30 called time slots. In a similar way, the radio base station is only allowed to use certain time slots for the downlink communication with the radio terminal. The remaining time slots of the first frequency band and the second frequency band are available for uplink and downlink communication between the

radio base station and other radio terminals in the cell(s) associated with the radio base station. TDMA is used in several digital PLMN, for example the GSM system (Global System for Mobile communications) and the D-AMPS system (Digital-AMPS (TDMA)).

The CDMA methods are somewhat more complicated than FDMA and TDMA. However, a common feature of the CDMA methods is that transmitted radio signals have a frequency bandwidth which is large in comparison with the bandwidth of the information that is transferred by the radio signals (band spread signals). The most common CDMA methods are frequency hopping CDMA and DS (Direct Sequence) CDMA. For example, the TIA (Telecommunications Industry Association) interim standard IS-95 makes use of DS access.

In the PLMN, ongoing communications between the radio terminals and the radio base stations must not be unintentionally lost, and the communication quality must be acceptable to users of the radio terminals. However, there are several known transmission problems that may cause communications to be lost and communication quality to be degraded. Some of the main transmission problems are path loss (i.e. a decreased signal strength due to an increased distance between the radio terminal and the radio base station), interference from other radio transmissions and Rayleigh fading (i.e. decreased signal strength due to destructive interference caused by multipath propagation of radio signals).

The normal remedy for path loss is to perform an inter-cell handoff, i.e. a change of channel from the channel associated with the radio base station via which the radio terminal is currently communicating to a second channel associated with a new radio base station which is closer to the radio terminal.

When interference is present, the received signal strength (on up- and/or downlink) is normally not low but the communication

quality is nevertheless poor, e.g. the bit error rate (BER) and/or frame erasure rate (FER) are high. Inter-cell handoff is therefore not a suitable remedy, since low signal strength is not the problem. The normal remedy is instead a change of
5 channel from the currently used channel to new channel associated with the same radio base station but using different frequencies than the currently used channel. Such a change of channel is commonly referred to as an intra-cell handoff.

The PLMNs has been used foremost with moving radio terminals,
10 such as mobile cellular radio phones. Rayleigh fading has therefore not been considered a severe transmission problem, since signal loss due to Rayleigh fading only occurs for fairly short periods of time, which normally does not jeopardise the communication quality to any great extent.

15 SUMMARY OF THE INVENTION

The present invention addresses mainly the problem of improving reliability and communication quality in a cellular radio communication system.

According to the present invention it is observed that today it
20 is becoming more common to have stationary or slowly moving radio terminals. For example, the use of computers having associated cellular radio communication equipment and stationary cellular phones (e.g. in communication units in dispense or slot machines and the like) is becoming more frequent. For stationary
25 and slow moving radio terminals Rayleigh fading is more likely to cause the loss of communications or severely degraded communication quality, especially in FDMA and TDMA systems. Rayleigh fading influences CDMA systems negatively to a lesser degree than FDMA and TDMA systems. However, in indoor
30 environments the coherence bandwidth is normally large, and Rayleigh fading may therefore influence also band spread signals negatively to a non-negligible extent.

The problem stated above is therefore solved in short by taking into account the negative influences of Rayleigh fading and actively responding in an appropriate manner to such influences.

5 A main object of the invention is thus to improve reliability and communication quality in cellular radio communication systems, and the invention includes methods as well as apparatuses for achieving this object.

10 The problem stated above is solved in somewhat more detail according to the following. It is determined whether one of an uplink or a downlink of a radio channel is subject to a Rayleigh fading dip. If it is determined that one of the uplink or the downlink is subject to a Rayleigh fading dip, it is then determined whether it is necessary to execute a countermeasure in order to avoid the negative influences of Rayleigh fading on
15 the channel. The invention is naturally not limited to improving conditions on one channel but may be employed to any number of channels used for communications in a PLMN.

In addition to solving the above-stated problem, the invention has the advantage that it provides a more optimal usage of
20 available channel resources, thereby increasing the coverage of the cellular radio communication system.

The invention will now be described further using preferred embodiments and referring to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a block diagram describing a PLMN.

Figure 2 is a block diagram describing a first radio terminal and a first radio base station in the PLMN.

Figure 3 is a block diagram describing a system for determining whether one of an uplink or a downlink of a channel associated

with the first radio base station is subject to a Rayleigh fading dip.

Figure 4 is a block diagram describing a system for determining whether to perform a handoff from the channel associated with the first radio base station.

Figure 5 is a block diagram describing a system for selecting a new channel to which handoff is to be performed from the channel associated with the first radio base station.

Figure 6 is a block diagram describing the first radio terminal and the first radio base station, the first radio base station having a design which differs slightly from the design of the first radio base station as portrayed in figure 2.

Figure 7 is a block diagram describing a system including a selected number of features of the system in figure 4.

Figure 8 is a block diagram describing a system for determining whether to perform a handoff from the channel associated with the first radio base station.

PREFERRED EMBODIMENTS

Figure 1 is a block diagram describing a PLMN 1 comprising a land system having a switching system 3 and a number (N) of radio base stations RBS1-RBSN. In this example the radio base stations RBS1-RBSN are arranged for providing radio communication services (e.g. speech communication or data communication) in corresponding cells C1-CN. The radio base stations RBS1-RBSN are connected to the switching system 3 by means of communication links L1-LN. In this example, the communication links L1-LN are landline connections. Alternatively, however, the communication links L1-LN are provided in some other form, e.g. in the form of radio links. The switching system includes a gateway node 4, which connects the PLMN 1 to other networks - in this example a PSTN 5, an ISDN

7 (Integrated Services Digital Network) and Internet 9. Radio terminals have subscriptions registered in the switching system 3. By way of example, a first radio terminal T1 is currently present in the cell C1 associated with the first radio base station RBS1, and a second radio terminal T2 is present in the cell CN associated with the Nth radio base station RBSN.

The first radio terminal T1 may communicate for example with the second radio terminal T2 via the first radio base station RBS1, the switching system 3 and the Nth radio base station RBSN. The first radio terminal T1 may also communicate with fixed phones (not shown) connected to the PSTN 5 or devices (not shown) connected to the ISDN 7 or Internet 9 via the first radio base station RBS1, the switching system 3 and the gateway node 4.

Figure 2 is a block diagram describing the first radio base station RBS1 and the first radio terminal T1 in more detail. The first radio base station RBS1 includes an antenna unit 11 and an antenna near part 13 which is arranged for connecting the antenna unit 11 to a modem part 15 of the first radio base station RBS1. The modem part 15 includes a number (M) of transceivers 17.1-17.M. The first radio base station RBS1 includes also a control part 19 and a power supply part 21. The control part 19 is arranged for controlling the operation of the first radio base station RBS1 and for connecting the first radio base station RBS1 to the communication link L1. The construction and function of the different parts of the first radio base station RBS1 are well known to persons skilled in the art and will not be described in further detail.

In figure 2, communication between the first radio terminal T1 and the first radio base station RBS1 is currently taking place over a first (duplex) channel 23 having an uplink 25 and a downlink 27. A first carrier frequency f1 is used for the uplink 25, and a second carrier frequency f2 is used for the downlink 27. The first carrier frequency f1 is separated from the second carrier frequency f2 by a predetermined duplex distance. The

first terminal T1 is arranged for continuously monitoring the received downlink signal strength SS2 and for continuously generating an estimate Q2 of the communication quality on the downlink 27. The first radio terminal T1 is also arranged for sending information concerning the signal strength SS2 of the downlink and the quality estimate Q2 to the first radio base station RBS1, e.g. over a control channel uplink 29. Furthermore, the first radio terminal T1 is arranged for receiving control information, such as power control orders, from the first radio base station RBS1, e.g. over a control channel downlink 31.

Radio signals that are sent over the downlink 27 from the first radio base station RBS1 will usually reach the first radio terminal T1 along more than one path due to reflections against objects, e.g. cars or buildings, in the surroundings. At the first terminal T1, signals that have travelled along different paths will superimpose. If the signals superimpose destructively, a decrease in received downlink signal strength SS2 will occur. This phenomenon is commonly known as Rayleigh fading. The degree of Rayleigh fading will vary depending on the position of the first radio terminal T1 and variations in the reflective surroundings. If the first radio terminal T1 is moving, low downlink signal strength SS2 due to Rayleigh fading will usually exist for relatively short periods of time, and the communication quality of the downlink will normally not be severely influenced. On the other hand, if the first radio terminal T1 is stationary or only slowly moving, Rayleigh fading may exist for longer periods of time, and the downlink communication quality may be severely degraded or the communications may be lost. In a similar way, Rayleigh fading will also effect the communications over the uplink 25. However, since the carrier frequency f_1 of the uplink 25 is different from the carrier frequency f_2 of the downlink 27, low uplink signal strength SS1 and low downlink signal strength SS2, due to Rayleigh fading, are not likely be present at the same time.

Figure 3 is a block diagram describing, as an example according to the present invention, a system 39 for determining whether one of the uplink 25 or the downlink 27 is subject to a Rayleigh fading dip, i.e. a particularly low uplink or downlink signal strength SS1 or SS2, which is due to Rayleigh fading. The system 39 is preferably arranged in the control part 19 of the first radio base station RBS1. Alternatively, however, the system 39 is arranged in some other part of the first radio base station RBS1 or at a location separate from the first radio base station RBS1.

The system 39 comprises a first differentiator 41, which is arranged for receiving a signal indicative of a measurement of the uplink signal strength SS1 and a signal indicative of an estimate of a transmitted uplink power P1. The first differentiator 41 is arranged for generating an uplink gain G1 by subtracting the estimated transmitted uplink power P1 from the uplink signal strength SS1 ($G1=SS1-P1$). The system 39 comprises also a second differentiator 43, which is arranged for receiving a signal indicative of a measurement of the downlink signal strength SS2 and a signal indicative of an estimate of a transmitted downlink power P2. The second differentiator 43 is arranged for generating a downlink gain G2 by subtracting the estimated transmitted downlink power P2 from the downlink signal strength SS2 ($G2=SS2-P2$). The system 39 comprises further a third differentiator 45, which is connected to the first and the second differentiator 41 and 43 and arranged for receiving the uplink and downlink gains G1 and G2. The third differentiator 45 is arranged for generating a gain difference ΔG by subtracting the downlink gain G2 from the uplink gain G1 ($\Delta G=G1-G2$).

The gain difference ΔG consists of two parts: a constant offset F and a varying Rayleigh difference R ($\Delta G=F+R$). The offset F accounts for a constant difference between the uplink and the downlink gain G1 and G2. The offset F is determined by several factors, such as the use of antenna diversity on the uplink 25,

equipment differences (e.g. different equipments or methods for measuring uplink and downlink signal strength SS1 and SS2 and/or for estimating transmitted uplink or downlink power P1 and P2), differences in antenna quality, combiner loss et cetera. The Rayleigh difference R varies, and the variations of the Rayleigh difference R depend mainly on the degree of Rayleigh fading influencing the uplink 25 and the downlink 27.

The system 39 comprises a first averaging filter 47, which is connected to the third differentiator 45 and arranged for receiving the gain difference ΔG . The first averaging filter 47 is arranged for generating the offset F by averaging the gain difference ΔG over a communication segment, i.e. a period of time during which communications between the first radio terminal T1 and the first radio base station RBS1 take place over the channel 23. The first averaging filter 47 is arranged for receiving, from the control part 19, a control signal SC. The control signal SC indicates to the first averaging filter 47 when the communication segment starts and ends. The system 39 further comprises a second averaging filter 49. The second averaging filter 49 is also arranged for receiving the gain difference ΔG . The second averaging filter 49 is arranged for generating a channel offset F1 by averaging the gain difference ΔG associated with the channel 23 for all communications performed over the channel 23 from a selected point in time which precedes the current communication segment. The channel offset F1 indicates a part of the offset F which depends mainly on the equipment, of the first radio base station RBS1, which is responsible for communications over the channel 23. The first averaging filter 47 is connected to the second averaging filter 49 and arranged for receiving the channel offset F1. The channel offset F1 is used in the first averaging filter 47 for initiating the averaging of the gain difference ΔG in order to reduce a convergence time of the averaging performed by the first averaging filter 47. However, as an alternative, the

second averaging filter 49 may be left out. In yet another alternative, the second averaging filter 49 is instead arranged for averaging the gain difference ΔG during communications performed over the channel 23 between the first radio base station RBS1 and radio terminals of the same type as the first radio terminal T1. This will produce a radio terminal type offset F11. The radio terminal type offset F11 indicates a part of the offset F which depends on similarities between radio terminals of the same type as the first radio terminal T1. The radio terminal type offset is used, in a similar way as the channel offset F1, for initiating the first averaging filter 47 in order to reduce the convergence time.

The system 39 further comprises a fourth differentiator 51, which is connected to the first averaging filter 47 and the third differentiator 45 and arranged for receiving the offset F and the gain difference ΔG . The fourth differentiator 51 is arranged for generating the Rayleigh difference R by subtracting the offset F from the gain difference ΔG .

The system 39 comprises means for determining whether one of the uplink 25 or the downlink 27 is subject to a Rayleigh fading dip by monitoring the Rayleigh difference R. The system 39 comprises a first low-pass filter 53, which is connected to the fourth differentiator 51 and arranged for receiving the Rayleigh difference R. The first low-pass filter 53 is arranged for generating a low-pass signal R1 by performing a low-pass filtering of the Rayleigh difference R. The first low-pass filter 53 is arranged for suppressing fast changes in the Rayleigh difference R. The low-pass signal R1 therefore reflects characteristics in the Rayleigh difference R that are of a more persistent nature. Filter parameters of the first low-pass filter 53 are preferably selected in order to suppress characteristics of the Rayleigh difference R that exist only for periods of time which are so short that Rayleigh fading during

these periods of time would have a negligible effect on the communication quality of the channel 23.

The system 39 further comprises an evaluator unit 55, which is connected to the first low-pass filter 53 and arranged for receiving the low-pass signal R1. Alternatively, however, the first low-pass filter 53 may be left out, and the evaluator unit 55 instead being arranged for receiving the Rayleigh difference R directly. The evaluator unit 55 is arranged for generating in dependence of the low-pass signal R1 (or alternatively R) a first and a second Rayleigh fading dip indicator RDI1 and RDI2. The RDI1 indicates whether or not the uplink 25 is subject to a Rayleigh fading dip. The RDI2 indicates, in a similar way, whether or not the downlink 27 is subject to a Rayleigh fading dip. The evaluator unit 55 is arranged for comparing the low-pass signal R1 (or alternatively R) with a first (positive) threshold value v1 and a second (negative) threshold value v2. Preferably, the threshold values v1 and v2 are symmetrical, i.e. $v1 = -v2$. The first threshold value v1 is preferably selected in the range from 3 dB to 10 dB and in particular the first threshold value is selected around 6 dB. The second threshold value is selected in a corresponding manner. If the low-pass signal R1 (or alternatively R) is greater than the first threshold value v1, then the evaluator unit 55 is arranged for generating the RDI2 to be one (1) (i.e. generating the RDI2 to exhibit a predetermined signal characteristic representing the digit 1) - the RDI2 thereby indicating that the downlink 27 is subject to a Rayleigh fading dip. Otherwise, the evaluator unit 55 is arranged for generating the RDI2 to be zero (0) (i.e. generating the RDI2 to exhibit a predetermined signal characteristic representing the digit 0) - the RDI2 thereby indicating that the downlink 27 is not subject to a Rayleigh fading dip. If the low-pass signal R1 (or alternatively R) is less than the second threshold value v2, then the evaluator unit is arranged for generating the RDI1 to be one (1) - the RDI1 thereby indicating that the uplink 25 is subject to a Rayleigh

fading dip. Otherwise, the evaluator unit 55 is arranged for generating the RDI1 to be zero (0) - the RDI1 thereby indicating that the uplink 25 is not subject to a Rayleigh fading dip.

5 The system 39 may, for example, be built with electrical components that are arranged on one or more circuit boards and/or on one or more integrated circuit units. The skilled person will appreciate that the functions performed by the system 39 may also be performed with a computer being programmed with appropriate software and having suitable signal inputs and
10 outputs, or with a computer in combination with additional hardware components.

The invention includes also a method, by which the system 39 operates, the method including method steps for carrying out the functions of the system 39, said method steps being readily
15 apparent to a skilled person from the above.

Once it has been determined by the system 39 that one of the uplink 25 or the downlink 27 is subject to a Rayleigh fading dip, the PLMN 1 is arranged for determining whether a handoff from the channel 23 is to be performed in order to improve
20 communication quality and reliability with respect to communication services provided to the first radio terminal T1 by the PLMN 1.

Figure 4 is a block diagram describing a system 59 for determining whether to perform a handoff from the channel 23.

25 The system 59 is preferably arranged in the control part 19 of the first radio base station RBS1. Alternatively, however, the system 59 is arranged in some other part of the first radio base station RBS1 or at a location separate from the first radio base station RBS1.

30 The system 59 comprises a first low-pass filter 61, which is arranged for receiving an estimate Q1 of the communication quality of the uplink 25. The first low-pass filter 61 is

arranged for generating a first filtered estimate Q12 by low-pass filtering the estimate Q1. The system 59 comprises a first evaluator unit 63, which is connected to the first filter 61 and arranged for receiving the first filtered estimate Q12. The first evaluator unit 63 is arranged for determining whether the quality of the uplink 25 is acceptable or not and for generating a first bad quality indicator BQI1 indicating whether the quality of the uplink 25 is bad (i.e. not acceptable) or acceptable. The system 59 comprises also a second low-pass filter 65, which is arranged for receiving the estimate Q2 of the communication quality of the downlink 27. The second low-pass filter 65 is arranged for generating a second filtered estimate Q22 by low-pass filtering the estimate Q2. The system 59 comprises also a second evaluator unit 67, which is connected to the second filter 65 and arranged for receiving the second filtered estimate Q22. The second evaluator unit 67 is arranged for determining whether the quality of the downlink 27 is acceptable or not and for generating a second bad quality indicator BQI2 indicating whether the quality of the downlink 27 is bad (i.e. not acceptable) or acceptable.

The estimates Q1 and Q2 are, for the digital case, preferably measurements of the bit error rates (BER) associated with the uplink 25 and the downlink 27. Alternatively, however, the estimates Q1 and Q2 are instead measurements of the frame erasure rates (FER) associated with the uplink 25 and the downlink 27 or combinations of measurements of BER and FER associated with the uplink 25 and the downlink 27, or something else. For the analogue case, the estimates Q1 and Q2 are preferably measurements of SINAD (Signal to Noise And Distortion) associated with the uplink 25 and the downlink 27. The first evaluator unit 63 is arranged for determining that the quality of the uplink 25 is acceptable if the first filtered estimate Q12 is smaller than or equal to a first quality threshold value QT1 and for determining that the quality of the uplink 25 is not acceptable if the first filtered estimate Q12

is greater than the first quality threshold value QT1. The second evaluator unit 67 is, in a similar way, arranged for determining that the quality of the downlink 27 is acceptable if the second filtered estimate Q22 is smaller than or equal to a second quality threshold value QT2 and for determining that the quality of the downlink 27 is not acceptable if the second filtered estimate Q22 is greater than the second quality threshold value QT2.

The evaluator units 63 and 67 are arranged to select the quality threshold values QT1 and QT2 depending on the character of the communications being performed over the channel 23. The threshold values QT1 and QT2 are consequently selected in one way for speech communications and in other ways for data communications. As is well understood by the skilled person, the way in which the threshold values QT1 and QT2 are preferably selected for speech communications depends on the type of communication system in which the system 59 is being used. If the system 59 is used in the D-AMPS system or similar, the threshold values QT1 and QT2 are preferably selected to correspond to bit error rates around 2%. If the system 59 is used in GSM or similar systems, the threshold values QT1 and QT2 are instead preferably selected to correspond to bit error rates around 5%. For data communications, such as "web-surfing" on the Internet and the like, the requirements on communication quality are normally less strict than the requirements for speech, and the quality threshold values QT1 and QT2 are thus selected less restrictively than for speech. For data communications requiring low or moderate communication quality, the threshold values are preferably selected to correspond to bit error rates around 10%. However, there are also data communications with higher requirements on communication quality, for example real time applications, voice over IP, streaming video et cetera. Consequently, for data communications having higher requirements on communication quality, the threshold values QT1 and QT2 are

selected more restrictively than for data communications not having high requirements on communication quality.

The system 59 further comprises a first AND-gate 73, which is arranged for receiving the first bad quality indicator BQI1 and the first Rayleigh fading dip indicator RDI1. During communications over the uplink 25, as is well known to the skilled person, information is normally not transferred over the uplink 25 all the time. For data communications, information is usually not sent continuously over the uplink 25 but instead in bursts of relatively short durations. For speech communications, information is normally sent continuously over the uplink 25 (and the downlink 27). However, since a user of the first radio terminal T1 is normally not speaking all the time, some of the information sent over the uplink 25 is just speech code (or dummy frames) representing "silence", which of course is information of no practical value. If no information or only information of no practical value is sent over the uplink 25, then the communication quality of the uplink 25 is of no interest. In order to take this fact into account, the AND-gate 73 is arranged for receiving a first load indicator LI1 from the control part 19 of the first radio base station RBS1. The first load indicator LI1 is arranged to be one (1) if information is in fact sent over the uplink 25. The first load indicator LI1 is arranged to be zero (0) if no information or only information of no practical value is sent over the uplink 25. The first AND-gate 73 is arranged to generate a first binary signal b1 in dependence of the received indicators BQI1, RDI1 and LI1. The first binary signal b1 is one (1) if, at the same time, the first bad quality indicator BQI1 indicates that the communication quality of the uplink 25 is not acceptable, the first Rayleigh dip indicator RDI1 indicates that the uplink is subject to a Rayleigh fading dip and the first load indicator LI1 indicates that information is sent over the uplink 25. Otherwise, the first binary signal is zero (0). The first binary signal b1 indicates, by being one (1), that a handoff should be

performed from the channel 23, since the communication quality of the uplink 25 is degraded due to Rayleigh fading and "valuable" information is in fact being sent over the uplink 25.

The system 59 further comprises a second AND-gate 75, which is
5 arranged for receiving the second Rayleigh dip indicator RDI2 and the second bad quality indicator BQI2. The second AND-gate 75 is also arranged for receiving a second load indicator LI2 from the control part 19 of the first radio base station RBS1. The second load indicator LI2 is arranged to be one (1) if
10 information is in fact sent over the downlink 27. The second load indicator LI2 is arranged to be zero (0) if no information or only information of no practical value is sent over the downlink 27. The second AND-gate 75 is arranged for generating a second binary signal b2. The second binary signal b2 is arranged
15 to be one (1) if, at the same time, the second bad quality indicator BQI2 indicates that the communication quality of the downlink 27 is not acceptable, the second Rayleigh dip indicator RDI2 indicates that the downlink 27 is subject to a Rayleigh fading dip and the second load indicator LI2 indicates that
20 information is sent over the downlink 27. Otherwise, the second binary signal b2 is arranged to be zero (0). The second binary signal b2 indicates, by being one (1), that a handoff should be performed from the channel 23, since the communication quality of the downlink 27 is degraded due to Rayleigh fading and
25 "valuable" information is in fact being sent over the downlink 27.

The system 59 further comprises an OR-gate 77, which is arranged for receiving the first and the second binary signal b1 and b2 and for generating a handoff trigger signal HT in dependence of
30 the first and the second binary signal b1 and b2. The handoff trigger signal HT is arranged to be one (1) if the first or the second binary signal b1 or b2 is one (1) - thereby indicating that a handoff should be performed from the channel 23. The handoff trigger signal HT is otherwise zero (0) - thereby

indicating that no handoff is to be performed from the channel 23. Consequently, the handoff trigger signal HT indicates that a handoff is to be performed from the channel 23 if the communication quality of the uplink 25 is severely degraded due to Rayleigh fading and "valuable" information is in fact sent over the uplink 25, or if similar conditions apply to downlink 27.

In an alternative to the system 59 in figure 4, the load indicators LI1 and LI2 may be left out. This will make the system less efficient with regards to usage of communication resources. On the other hand, however, a somewhat simpler system is obtained.

The system 59 may, for example, be built with electrical components on one or more circuit boards and/or on one or more integrated circuit units. The skilled person will appreciate that the functions performed by the system 59 may also be performed with a computer being programmed with appropriate software and having suitable signal inputs and outputs, or with a computer in combination with additional hardware components.

The invention includes also a method, by which the system 59 operates, the method including method steps for carrying out the functions of the system 59, said method steps being readily apparent to a skilled person from the above.

If the handoff trigger signal HT indicates that a handoff is to be performed from the channel 23, a new channel is selected to which the handoff can be made. It is preferred to select the new channel for an intra-cell handoff.

Figure 5 is a block diagram describing a system 81 for selecting the new channel to which intra-cell handoff is to be performed from the channel 23. The system 81 is preferably arranged in the control part 19 of the first radio base station RBS1. Alternatively, however, the system 81 is arranged in some other

part of the first radio base station RBS1 or at a location separate from the first radio base station RBS1.

The system 81 comprises a first unit 83, which is arranged for receiving the handoff trigger signal HT. The first unit 83 is
5 arranged for determining a set of channels which are associated with the first radio base station RBS1 and which are available for intra-cell handoff responsive to the handoff trigger signal HT indicating that a handoff should be performed from the channel 23. In a preferred embodiment the set of channels
10 includes all channels which are associated with the first radio base station RBS1 and which are available for intra-cell handoff. Alternatively, however, the set of channels may include fewer than all such channels. The system 81 comprises a second unit 85, which is also arranged for receiving the handoff
15 trigger signal HT. Responsive to the handoff trigger signal HT indicating that a handoff should be performed, the second unit 85 is arranged for generating a first signal s1. The first signal s1 corresponds to the carrier frequency f1 of the uplink 25, in case the uplink is subject to a Rayleigh fading dip, and
20 to the carrier frequency f2 of the downlink 27, in case the downlink 27 is subject to a Rayleigh fading dip.

The system 81 is arranged for selecting from the set of channels, the new channel to which intra-cell handoff from the channel 23 is to be performed, as will be explained in the
25 following.

The first unit 83 is arranged for generating a second signal s2. If the uplink 25 is subject to a Rayleigh fading dip, the first unit 83 is arranged for generating the second signal s2 so that it corresponds, in sequence, to each one of the carrier
30 frequencies of the uplinks of the channels in the set of channels. If, instead, the downlink 27 is subject to a Rayleigh fading dip, the first unit 83 is arranged for generating the second signal s2 so that it corresponds, in sequence, to each

one of the carrier frequencies of the downlinks of the channels in the set of channels.

5 The system 81 further comprises a divider unit 87, which is connected to the first unit 83 and the second unit 85 and arranged for receiving the first signal s1 and the second signal s2. The divider unit 87 is arranged for generating a remainder r associated with a quotient between the carrier frequency indicated by the first signal s1 and the carrier frequency currently indicated by the second signal s2. The system 81
10 comprises a comparing unit 89, which is connected to the divider unit 87 and arranged for receiving the remainder r. The comparing unit 89 is arranged for generating a trigger indicator T if the received remainder r is not zero. The system 81 comprises a differentiator 91, which is connected to the first
15 unit 83 and the second unit 85 and arranged for receiving the first signal s1 and the second signal s2. The differentiator 91 is also connected to the comparing unit 89. The differentiator 91 is arranged for generating a difference signal d in dependence of the first and the second signal s1 and s2
20 responsive to receiving the trigger indicator T from the comparing unit 89. The differentiator 91 is arranged for generating the difference signal d so that it corresponds to an absolute value of a difference between the carrier frequency indicated by the first signal s1 and the carrier frequency
25 currently indicated by the second signal s2.

The system 81 further comprises a maximum unit 93, which is connected to the differentiator 91 and arranged for receiving the difference signal d. The maximum unit 93 is arranged for comparing the value that is currently being indicated by the
30 difference signal d with a value which is stored in the maximum unit 93. If the value indicated by the difference signal d is greater than the previously stored value, the maximum unit 93 is arranged for replacing the stored value with the value indicated by the difference signal d. The maximum unit 93 is arranged for.

generating a maximum signal M, which corresponds to the value which is currently stored in the maximum unit 93. The maximum unit 93 is also arranged for receiving a start and reset signal SR from the first unit 83. The first unit 83 is arranged for
5 generating the start and reset signal SR so that it indicates to the maximum unit 93 the start of the channel selection process. Upon receiving such a start indication, the maximum unit 93 is arranged to reset itself by setting the stored value to zero.

The first unit 83 is also connected to the maximum unit 93 and
10 arranged for receiving the maximum signal M. The first unit 83 is arranged for registering the value indicated by the maximum signal M responsive to the first unit 83 having run through all uplink - or when applicable downlink - carrier frequencies associated with the channels in the set of channels.

15 If the uplink 25 is subject to a Rayleigh fading dip, then the value registered by the first unit 83 will provide an indication of the carrier frequency (or frequencies), among the carrier frequencies of the uplinks of the channels in the set of channels, which differs the most from the carrier frequency f1
20 of the uplink 25 without being an integer multiple of the carrier frequency f1 of the uplink 25. If, instead, the downlink 27 is subject to a Rayleigh fading dip, then the value registered by the first unit 83 will provide an indication of the carrier frequency (or frequencies), among the carrier
25 frequencies of downlinks of the channels in the set of channels, which differs the most from the carrier frequency f2 of the downlink 27 without being an integer multiple of the carrier frequency f2 of the downlink 27. The first unit 83 is arranged for selecting, as the new channel, the channel in the set of
30 channels which corresponds to the carrier frequency indicated by the registered value. The first unit 83 is also arranged for generating a channel selection signal CSS indicating the selected new channel. The control part 19 of the first radio base station RBS1 is arranged for receiving the channel

selection signal CSS and for performing, in a manner well known to the skilled person, the necessary actions for an intra-cell handoff to take place from the channel 23 to the new channel indicated by the channel selection signal CSS.

5 In summary, the system 81 is arranged for determining the set of channels, which contains possible candidates to which intra-cell handoff can be performed from the channel 23. If the uplink 25 is subject to a Rayleigh fading dip, the system 81 is arranged for selecting, as the new channel, the channel in the set of
10 channels which has an uplink carrier frequency which differs the most from the carrier frequency f_1 of the uplink 25 without being an integer multiple of the carrier frequency f_1 of the uplink 25. If, instead, the downlink 27 is subject to a Rayleigh fading dip, the system 81 is arranged for selecting, as the new
15 channel, the channel in the set of channels which has a downlink carrier frequency which differs the most from the carrier frequency f_2 of the downlink 27 without being an integer multiple of the carrier frequency f_2 of the downlink 27.

The system 81 is arranged for selecting the new channel for
20 intra-cell handoff. However, the invention is not limited to performing an intra-cell handoff, and the new channel may also be selected for an inter-cell handoff. For example, in the D-AMPS system channels from two separated frequency bands (the 900- and the 1900-band) are being employed. Each radio base
25 station is associated with channels from one of the two bands. However, two radio base stations, having associated channels from different bands, often share the same site, i.e. the same geographical location. In such a situation, instead of performing an intra-cell handoff, an inter-cell handoff to a
30 channel associated with the other radio base station sharing the same site may be contemplated. The system 81 can easily be modified in order to incorporate the "dual-band" inter-cell handoff considerations into the channel selection process. The first unit 83 is simply modified so that it incorporates into

the set of channels also channels which are associated with a radio base station sharing the same site as the first radio base station RBS1 and which are available for inter-cell handoff.

5 The system 81 may, for example, be built with electrical components that are arranged on one or more circuit boards and/or one or more integrated circuit units. The skilled person will appreciate that the functions performed by the system 81 may also be performed with a computer being programmed with appropriate software and having suitable signal inputs and
10 outputs, or with a computer in combination with additional hardware components.

The invention includes also a method, by which the system 81 operates, the method including method steps for carrying out the functions of the system 81, said method steps being readily
15 apparent to a skilled person from the above.

The systems 39, 59 and 81 are in the examples disclosed and indicated above arranged for co-operation in functions relating to channel allocation in the PLMN 1, in order to provide countermeasures to the negative influences of Rayleigh fading.
20 In such co-operation the systems 39, 59 and 81 may be arranged together or separately. The invention includes also a method, by which the systems 39, 59 and 81 co-operate, the method including method steps for carrying out the functions of the systems 39, 59 and 81, said method steps being readily apparent to a skilled
25 person from the above.

In the examples disclosed and indicated above the systems 39, 59 and 81 are arranged for providing countermeasures against Rayleigh fading influencing the channel 23. Naturally, the PLMN 1 may include any number of further systems, similar to the
30 systems 39, 59 and 81, for providing countermeasures against communication quality degradation due to Rayleigh fading with respect to a corresponding number of further channels. The further channels being associated with the first radio base

station RBS1 and/or one or more of the other radio base stations RBS2-RBSN.

Although, in the examples disclosed and indicated above, the systems 39, 59 and 81 are arranged for co-operation in channel allocation, the skilled person will appreciate that the systems 39, 59 and 81 may also be used in combination or separately for performing their respective functions also for other purposes. For example, the system 39 may be used for determining whether uplinks or downlinks are subject to Rayleigh fading dips in any situation where such a determination is desirable.

Furthermore, the system 39 may be used in conjunction with the system 59 in order to generate a trigger signal, which corresponds to the handoff trigger signal HT but which is used instead for indicating that a countermeasure, other than handoff, is to be performed.

Figure 6 is a block diagram describing again the first radio terminal T1 and the first radio base station RBS1, the first radio base station RBS1 having in figure 6 an alternative design which differs slightly from the design of the first radio base station RBS1 as shown in figure 2. The first radio base station RBS1 in figure 6 includes a first and a second antenna 11a and 11b, which are used at least for radio transmissions from the first radio base station RBS1. The first and the second antenna 11a and 11b are arranged at different locations. The transceivers 17.1-17.M each include a first and a second controllable power amplifier PAa.1-PAa.M and PAb.1-PAb.M. The first power amplifier PAa.1-PAa.M of each transceiver 17.1-17.M is connected to the first antenna 11a via the antenna near part 13, and in a similar way the second power amplifier PAb.1-PAb.M of each transceiver 17.1-17.M is connected to the second antenna 11b via the antenna near part 13. An antenna control unit 95 is arranged for generating a first power control signal pc1 for controlling the first power amplifier PAa.1 of the first transceiver 17.1, which in this example is arranged for handling

communications associated with the channel 23. The antenna control unit 95 is arranged for generating a second power control signal pc2 for controlling the second power amplifier PAb.1 of the first transceiver 17.1. In the example shown in figure 6, the access method used is TDMA, and the antenna control unit 95 is arranged for receiving from the control part 19 a timing signal TS indicating when time slots associated with channels which are handled by the first transceiver 17.1 are to be transmitted from the first radio base station RBS1. Alternatively, however, the antenna control unit 95 may receive the timing signal TS from, for example, the modem part 15 of the first radio base station RBS1. The antenna control unit 95 is also arranged for receiving the second binary signal b2 from the system 59. The antenna control unit 95 is arranged for controlling the power amplifiers PAa.1 and PAb.1 in dependence of the timing signal TS so that signals are transmitted over the downlink 27 of the channel 23 only from one of the antennas 11a or 11b at the time. In order to counteract the negative influences of Rayleigh fading on the downlink 27, the antenna control unit 95 is arranged for switching the transmitting antenna 11a (or 11b) when the second binary signal b2 is one (1), i.e. when the communication quality of the downlink 27 is degraded due to Rayleigh fading.

Since the antenna control unit 95 only receives the second binary signal b2, the whole of the system 59 is not needed for the operation of the antenna control unit 95. Instead, it should be pointed out that a simpler system 59b, as shown in figure 7, may be used. The system 59b includes only those features of the system 59 which are needed for generating the second binary signal b2. Consequently, the system 59b includes the second low-pass filter 65, the second evaluator unit 67 and the second AND-gate 75. However, as these features have been described thoroughly above when discussing the system 59, they will not be described again.

In the example in figure 6, the antennas 11a and 11b are, for reasons of clarity, switched only for the downlink 27 of the channel 23, which is in the example is handled by the first transceiver 17.1. However, the PLMN 1 may also include other systems, similar to the systems 59 or 59b, for generating other binary signals, similar to the second binary signal b2, indicating whether other channels handled by the first transceiver 17.1 have downlinks which have degraded communication quality due to Rayleigh fading. The antenna control unit 95 is then arranged for receiving these other signals and for controlling the power amplifiers PAa.1 and PAb.1 so that the transmitting antenna 11a (or 11b) is switched in an appropriate manner also for the downlinks of the these other channels handled by the first transceiver 17.1. Furthermore, the PLMN 1 may include any number of further systems, similar to the systems 59 or 59b, and corresponding antenna control units, similar to the antenna control unit 95, for providing similar antenna switching with respect to downlinks of any number of channels handled by the other transceivers 17.2-17.M.

For reasons of clarity, the antenna control unit 95 is drawn outside the first radio base station RBS1 in figure 6. However, in practice the antenna control unit 95 is preferably arranged in the modem part 15 of the first radio base station RBS1 or, alternatively, in the control part 19 of the first radio base station RBS1.

In figure 8 is shown a block diagram describing a system 100 for determining whether to perform an intra-cell handoff from the channel 23. The system 100 may be used as an alternative to the system 59. The system 100 is preferably located in the control part 19 of the first radio base station RBS1. Alternatively, however, the system 100 is located in some other part of the first radio base station RBS1 or at a location separate from the first radio base station RBS1.

The system 100 comprises a first low-pass filter 101 which is arranged for receiving the uplink communication quality estimate Q1. The first low-pass filter 101 is arranged for generating the first filtered estimate Q12 by low-pass filtering the estimate Q1. A first evaluator unit 103 is connected to the first low-pass filter 101 and arranged for receiving the low-pass filtered estimate Q12. The first evaluator unit 103 is arranged for determining in dependence of the filtered estimate Q12 whether or not the communication quality of the uplink 25 is acceptable and for generating the first bad quality indicator BQI1 indicating whether the communication quality of the uplink 25 is bad (not acceptable) or acceptable. The first evaluator unit 103 is arranged for determining that the communication quality of the uplink 25 is bad if the filtered estimate Q12 is greater than the first quality threshold value QT1. Otherwise, the first evaluator unit 103 is arranged for determining that the communication quality of the uplink 25 is acceptable. Consequently, the functions performed by the first low-pass filter 101 and the first evaluator unit 103 of the system 100 are in principal identical to the functions performed by the first low-pass filter 61 and the first evaluator unit 63 of the system 59.

The system 100 further comprises a second low-pass filter 105, which is arranged for receiving a measurement of the received downlink signal strength SS2 and for generating a filtered downlink signal strength SS22 by performing a low-pass filtering of the downlink signal strength SS2. A second evaluator unit 107 is connected to the second low-pass filter 105 and arranged for receiving the filtered downlink signal strength SS22. The second evaluator unit 107 is arranged for comparing the filtered downlink strength SS22 with a downlink signal strength threshold value SST2 indicating a level of downlink signal strength SS2 which is considered acceptable. The second evaluator unit 107 is arranged for generating a downlink signal strength indicator

SSI2 indicating whether or not the downlink signal strength SS2 is acceptable.

The system 100 further comprises a first AND-gate 109 which is connected to the first and the second evaluator unit 103 and 107 and arranged for receiving the first bad quality indicator BQI1 and the downlink signal strength indicator SSI2. The first AND-gate 109 is arranged for generating an uplink indicator UI in dependence of the received indicators BQI1 and SSI2. The uplink indicator UI is arranged to be one (1) if, at the same time, the first bad quality indicator BQI1 indicates that the communication quality of the uplink 25 is not acceptable and the downlink signal strength indicator SSI2 indicates that the signal strength SS2 of the downlink 27 is acceptable. Otherwise, the uplink indicator UI is arranged to be zero (0). If the downlink signal strength SS2 is acceptable, it is not likely that the communication quality of the uplink 25 is degraded due to path loss or shading. Instead, it is much more likely that the communication quality of the uplink 25 is degraded due to a Rayleigh fading dip influencing the uplink 25. Consequently, by being one (1), the uplink indicator UI indicates that the communication quality of the uplink 25 is most likely degraded due to a Rayleigh fading dip and that a handoff should be performed from the channel 23.

The system 100 further comprises a third low-pass filter 111 which is arranged for receiving the downlink communication quality estimate Q2. The third low-pass filter 111 is arranged for generating the second filtered estimate Q22 by low-pass filtering the estimate Q2. A third evaluator unit 113 is connected to the third low-pass filter 111 and arranged for receiving the filtered estimate Q22. The third evaluator unit 113 is arranged for determining in dependence of the filtered estimate Q22 whether or not the communication quality of the downlink 27 is acceptable and for generating the second bad quality indicator BQI2 indicating whether the communication

quality of the downlink 27 is bad (not acceptable) or acceptable. The third evaluator unit 113 is arranged for determining that the communication quality of the downlink 27 is bad if the filtered estimate Q22 is greater than the second quality threshold value QT2. Otherwise, the third evaluator unit 113 is arranged for determining that the communication quality of the downlink 27 is acceptable. Consequently, the functions performed by the third low-pass filter 111 and the third evaluator unit 113 of the system 100 are in principal identical to the functions performed by the second low-pass filter 65 and the second evaluator unit 67 of the system 59.

The system 100 further comprises a fourth low-pass filter 115, which is arranged for receiving a measurement of the received uplink signal strength SS1 and for generating a filtered uplink signal strength SS12 by performing a low-pass filtering of the uplink signal strength SS1. A fourth evaluator unit 117 is connected to the fourth low-pass filter 115 and arranged for receiving the filtered uplink signal strength SS12. The fourth evaluator unit 117 is arranged for comparing the filtered uplink signal strength SS12 with an uplink signal strength threshold value SST1 indicating a level of uplink signal strength SS1 which is considered acceptable. The fourth evaluator unit 117 is arranged for generating an uplink signal strength indicator SSI1 indicating whether or not the uplink signal strength SS1 is acceptable.

The system 100 further comprises a second AND-gate 119 which is connected to the third and the fourth evaluator unit 113 and 117 and arranged for receiving the second bad quality indicator BQI2 and the uplink signal strength indicator SSI1. The second AND-gate 119 is arranged for generating an downlink indicator DI in dependence of the received indicators BQI2 and SSI1. The downlink indicator DI is arranged to be one (1) if, at the same time, the second bad quality indicator BQI2 indicates that the communication quality of the downlink 27 is not acceptable and

the uplink signal strength indicator SS11 indicates that the signal strength SS1 of the uplink 25 is acceptable. Otherwise, the downlink indicator DI is arranged to be zero (0). If the uplink signal strength SS1 is acceptable, it is not likely that the communication quality of the downlink 27 is degraded due to path loss or shading. Instead, it is much more likely that the communication quality of the downlink 27 is degraded due to a Rayleigh fading dip influencing the downlink 27. Consequently, by being one (1), the downlink indicator DI indicates that the communication quality of the downlink 27 is most likely degraded due to a Rayleigh fading dip and that a handoff should be performed from the channel 23.

The system 100 further comprises an OR-gate 121 which is connected to the first and the second AND-gate 109 and 119. The OR-gate 121 is arranged for generating a handoff trigger signal HTb in dependence of the uplink indicator UI and the downlink indicator DI. The handoff trigger signal HTb is arranged to be one (1) if the uplink indicator UI or the downlink indicator DI is one (1) - thereby indicating that a handoff should be performed from the channel 23, since either the uplink 25 or the downlink 27 subject to a Rayleigh fading dip which degrades the communication quality of either link 25 or 27. Otherwise, the handoff trigger signal HTb is arranged to be zero (0).

The system 100 may, for example, be built with electrical components arranged on one or more circuit boards and/or on one or more integrated circuit units. The functions performed by the system 100 may also be performed with a computer being programmed with appropriate software and having suitable signal inputs and outputs, or by computer in combination with additional hardware components.

The invention includes also a method by which the system 100 operates, said method including steps for performing the functions of the system 100, said method steps being readily apparent to a skilled person from the above.

The system 81 may be used together with the system 100 for determining a new channel to which handoff (intra-cell or inter-cell) is to be performed from the channel 23 once it has been determined by the system 100 that a handoff is to take place.

- 5 Furthermore, the antenna control unit 95 in figure 6 may alternatively receive the downlink indicator DI from the system 100 (or from a system including only those features of the system 100 which are needed for the generation of the downlink indicator DI) instead of the second binary signal b2.
- 10 The invention may be used with most forms of radio telecommunication systems, such as D-AMPS, PDC (Pacific Digital Cellular), GSM, GPRS(EDGE), IS-95 et cetera. In particular, the invention may be used with radio telecommunication systems using channels in a plurality of separated frequency bands (e.g. dual
- 15 band systems, such as GSM 900/1800, GSM 900/1900 (PCS), D-AMPS, IS-95 900/1900 et cetera).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
21

CLAIMS

1. A method for use in improving reliability and communication quality in a cellular radio communication system (1) which includes at least a first radio base station (RBS1) having associated radio channels with uplinks and downlinks using different carrier frequencies, the method **characterised** by comprising:

10 determining whether one of a first uplink (25) or a first downlink (27) of a first radio channel (23) is subject to a Rayleigh fading dip, the first radio channel (23) being used during a current communication segment for communications between the first radio base station (RBS1) and a first radio terminal (T1); and

15 determining whether to execute a countermeasure in order to counteract the negative influences of Rayleigh fading, if it is determined that one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

20 2. A method according to claim 1, wherein the determining of whether one of the first uplink or the first downlink is subject to a Rayleigh fading dip includes:

obtaining a gain of the first uplink (25);

obtaining a gain of the first downlink (27); and

25 comparing the gain of the first uplink (25) to the gain of the first downlink (27) in order to deduce whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

30 3. A method according to claim 2, wherein the comparing includes:

determining an offset (F) associated with a difference between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment;

35 and

determining whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip by monitoring how the difference between the gain of the first uplink (25) and the gain the first downlink (27) deviates from the offset (F).

4. A method according to claim 3, wherein the determining of the offset (F) includes determining the offset (F) by establishing an average value of the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment.

5. A method according to claim 4, wherein the method further comprises:
generating an initiation value for use as a starting point when establishing the average value in order to reduce a convergence time of the establishing of the average value.

6. A method according to claim 5, wherein the generating of the initiation value includes generating the initiation value (F1) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during all communications performed over the first radio channel (23) from a selected point in time which precedes the current communication segment.

7. A method according to claim 5, wherein the generating of the initiation value includes generating the initiation value (F11) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during communications performed over the first radio channel (23) between the first radio base station (RBS1) and radio terminals of the same type as the first radio terminal (T1).

8. A method according to any one of the claims 3 to 7, wherein the monitoring includes determining that the first downlink (27) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) exceeds the offset (F) by more than a first predetermined value.

9. A method according to any one of the claims 3 to 8, wherein the monitoring includes determining that the first uplink (25) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) falls below the offset (F) by more than a second predetermined value.

10. A method according to claim 1, wherein the determining of whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip includes:

obtaining a quality estimate (Q1) of the first uplink (25);
determining in dependence of the quality estimate (Q1) of the first uplink (25) whether the communication quality of the first uplink (25) is acceptable;

obtaining a measurement of a first downlink signal strength (SS2) received by the first radio terminal (T1);

determining in dependence of the measured first downlink signal strength (SS2) whether the first downlink signal strength is acceptable; and

determining that the first uplink (25) is subject to a Rayleigh fading dip, if the communication quality of the first uplink (25) is not acceptable and the first downlink signal strength (SS2) is acceptable.

11. A method according any one of claims 1 or 10, wherein the determining of whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip includes:

obtaining a quality estimate (Q2) of the first downlink (27);

5 determining in dependence of the quality estimate (Q2) of the first downlink (27) whether the communication quality of the first downlink (27) is acceptable;

obtaining a measurement of a first uplink signal strength (SS1) received by the first radio base station (RBS1);

10 determining in dependence of the measured first uplink signal strength (SS1) whether the first uplink signal strength is acceptable; and

determining that the first downlink (27) is subject to a Rayleigh fading dip, if the communication quality of the first downlink (27) is not acceptable and the first uplink signal strength (SS1) is acceptable.

15

12. A method according any one of the claims 1 to 9, wherein the determining of whether to execute the countermeasure includes:

obtaining a quality estimate (Q1) of the first uplink (25);

20 determining in dependence of the quality estimate (Q1) of the first uplink (25) whether a communication quality of the first uplink (25) is acceptable; and

determining to execute the countermeasure, if the first uplink (25) is subject to a Rayleigh fading dip and the communication quality of the first uplink (25) is not acceptable.

25

13. A method according any one of the claims 1 to 9, or 12, wherein the determining of whether to execute the countermeasure includes:

30 obtaining a quality estimate (Q2) of the first downlink (27);

determining in dependence of the quality estimate (Q2) of the first downlink (27) whether a communication quality of the first downlink (27) is acceptable; and

determining to execute the countermeasure, if the first downlink (27) is subject to a Rayleigh fading dip and the communication quality of the first downlink (27) is not acceptable.

5

14. A method according to any one of the claims 1 to 9, or 13, wherein the determining of whether to execute the countermeasure includes:

obtaining a quality estimate (Q1) of the first uplink (25);
10 determining in dependence of the quality estimate (Q1) of the first uplink (25) whether a communication quality of the first uplink (25) is acceptable;

determining when information is sent over the first uplink (25); and

15 determining to execute the countermeasure, if information is sent over the first uplink (25) while the first uplink (25) is subject to a Rayleigh fading dip and the communication quality of the first uplink (25) is not acceptable.

20 15. A method according to any one of the claims 1 to 9, 12 or 14, wherein the determining of whether to execute the countermeasure includes:

obtaining a quality estimate (Q2) of the first downlink (27);

25 determining in dependence of the quality estimate (Q2) of the first downlink (27) whether a communication quality of the first downlink (27) is acceptable;

determining when information is sent over the first downlink (27); and

30 determining to execute the countermeasure, if information is sent over the first downlink (27) while the first downlink (27) is subject to a Rayleigh fading dip and the communication quality of the first downlink (27) is not acceptable.

16. A method according to any one of the claims 1, 10 or 11, wherein the determining whether to execute the countermeasure includes determining to execute the countermeasure, if it is determined that the first uplink (25) is subject to a Rayleigh fading dip.

17. A method according any one of the claims 1, 10, 11 or 16, wherein the determining whether to execute the countermeasure includes determining to execute the countermeasure, if it is determined that the first downlink (27) is subject to a Rayleigh fading dip.

18. A method according to any one of the claims 1 to 17, wherein the determining whether to execute the countermeasure includes determining whether to perform a handoff from the first radio channel (23).

19. A method according claim 18, wherein the method further comprises:
selecting a new channel to which handoff is to be performed, if it is determined to perform a handoff from the first radio channel (23); and
performing handoff from the first radio channel (23) to the new channel.

20. A method according to claim 19, wherein the selecting includes:

determining a set of channels which are available for handoff; and
selecting the new channel from the set of channels.

21. A method according to claim 20, wherein the determining of the set of channels includes determining the set of channels to include at least one channel associated with the first radio base station (RBS1).

22. A method according to any one of the claims 20 or 21, wherein the cellular radio communication system includes at least a second radio base station having essentially the same location as the first radio base station, and wherein the determining of the set of channels includes determining the set of channels to include at least one channel associated with the second radio base station.
23. A method according to any one of the claims 20, 21 or 22, wherein the selecting of the new channel from the set of channels includes, if the first uplink (25) is subject to a Rayleigh fading dip, selecting from the set of channels the channel having an uplink using a carrier frequency which differs the most from the carrier frequency of the first uplink (25) without being essentially an integer multiple of the carrier frequency of the first uplink (25).
24. A method according any one of the claims 20, 21 or 22, wherein the selecting of the new channel from the set of channels includes, if the first downlink (27) is subject to a Rayleigh fading dip, selecting from the set of channels the channel having a downlink using a carrier frequency which differs the most from the carrier frequency of the first downlink (27) without being essentially an integer multiple of the carrier frequency of the first downlink (27).
25. A method according to any one of the claims 1 to 17, wherein the determining of whether to execute the countermeasure includes determining whether to switch a transmitting antenna (11a,11b).
26. A method for determining whether one of a first uplink (25) or first downlink (27) of a first radio channel (23) is subject to a Rayleigh fading dip, the first radio channel (23) being

used during a current communication segment for communications between a first radio base station (RBS1) and a first radio terminal (T1), the method **characterised** by comprising:

obtaining a gain of the first uplink (25);

5 obtaining a gain of the first downlink (27); and

comparing the gain of the first uplink (25) to the gain of the first downlink (27) in order to deduce whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

10

27. A method according to claim 26, wherein the comparing includes:

determining an offset (F) associated with a difference between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment;

15

and

determining whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip by monitoring how the difference between the gain of the first uplink (25) and the gain the first downlink (27) deviates from the offset (F).

20

28. A method according to claim 27, wherein the determining of the offset (F) includes determining the offset (F) by establishing an average value of the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment.

25

29. A method according to claim 28, wherein the method further comprises:

30

generating an initiation value for use as a starting point when establishing the average value in order to reduce a convergence time of the establishing of the average value.

30. A method according to claim 29, wherein the generating of the initiation value includes generating the initiation value (F1) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during all communications performed over the first radio channel (23) from a selected point in time which precedes the current communication segment.

31. A method according to claim 29, wherein the generating of the initiation value includes generating the initiation value (F11) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during communications performed over the first radio channel (23) between the first radio base station (RBS1) and radio terminals of the same type as the first radio terminal (T1).

32. A method according to any one of claims 27 to 31, wherein the monitoring includes:

determining that the first downlink (27) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) exceeds the offset (F) by more than a first predetermined value; and

determining that the first uplink (25) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) falls below the offset (F) by more than a second predetermined value.

33. An apparatus for use in improving reliability and communication quality in a cellular radio communication system (1) which includes at least a first radio base station (RBS1) having associated radio channels with uplinks and downlinks using different carrier frequencies, the apparatus **characterised** in that it comprises:

means for determining whether one of a first uplink (25) or a first downlink (27) of a first radio channel (23) is subject to a Rayleigh fading dip, the first radio channel (23) being used during a current communication segment for communications between the first radio base station (RBS1) and a first radio terminal (T1); and

means for determining whether to execute a countermeasure in order to counteract the negative influences of Rayleigh fading, if it is determined that one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

34. An apparatus according to claim 33, wherein the means for determining of whether one of the first uplink or the first downlink is subject to a Rayleigh fading dip includes:

means for obtaining a gain of the first uplink (25);
means for obtaining a gain of the first downlink (27); and
means for comparing the gain of the first uplink (25) to the gain of the first downlink (27) in order to deduce whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

35. An apparatus according to claim 34, wherein the means for comparing includes:

means for determining an offset (F) associated with a difference between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment; and

means for monitoring how the difference between the gain of the first uplink (25) and the gain the first downlink (27) deviates from the offset (F).

36. An apparatus according to claim 35, wherein the means for determining the offset (F) includes means for determining the offset (F) by establishing an average value of the difference

between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment.

37. An apparatus according to claim 36, wherein the apparatus
5 further comprises:

means for generating an initiation value for use as a starting point when establishing the average value in order to reduce a convergence time of the establishing of the average value.

10

38. An apparatus according to claim 37, wherein the means for generating the initiation value includes means for generating the initiation value (F1) by averaging the difference between the gain of the first uplink (25) and the gain of the first
15 downlink (27) during all communications performed over the first radio channel (23) from a selected point in time which precedes the current communication segment.

39. An apparatus according to claim 37, wherein the means for
20 generating the initiation value includes means for generating the initiation value (F11) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during communications performed over the first radio channel (23) between the first radio base station (RBS1)
25 and radio terminals of the same type as the first radio terminal (T1).

40. An apparatus according to any one of the claims 35 to 39,
30 wherein the means for monitoring includes means for determining that the first downlink (27) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) exceeds the offset (F) by more than a first predetermined value.

41. An apparatus according to any one of the claims 35 to 40, wherein the means for monitoring includes means for determining that the first uplink (25) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) falls below the offset (F) by more than a second predetermined value.

42. An apparatus according to claim 33, wherein the means for determining whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip includes:
means for obtaining a quality estimate (Q1) of the first uplink (25);

means for determining in dependence of the quality estimate (Q1) of the first uplink (25) whether the communication quality of the first uplink (25) is acceptable;

means for obtaining a measurement of a first downlink signal strength (SS2) received by the first radio terminal (T1);

means for determining in dependence of the measured first downlink signal strength (SS2) whether the first downlink signal strength is acceptable; and

means for determining that the first uplink (25) is subject to a Rayleigh fading dip, if the communication quality of the first uplink (25) is not acceptable and the first downlink signal strength (SS2) is acceptable.

43. An apparatus according any one of claims 33 or 42, wherein the means for determining whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip includes:

means for obtaining a quality estimate (Q2) of the first downlink (27);

means for determining in dependence of the quality estimate (Q2) of the first downlink (27) whether the communication quality of the first downlink (27) is acceptable;

means for obtaining a measurement of a first uplink signal strength (SS1) received by the first radio base station (RBS1);

means for determining in dependence of the measured first uplink signal strength (SS1) whether the first uplink signal strength is acceptable; and

means for determining that the first downlink (27) is subject to a Rayleigh fading dip, if the communication quality of the first downlink (27) is not acceptable and the first uplink signal strength (SS1) is acceptable.

10

44. An apparatus according any one of the claims 33 to 41, wherein the means for determining whether to execute the countermeasure includes:

means for obtaining a quality estimate (Q1) of the first uplink (25);

means for determining in dependence of the quality estimate (Q1) of the first uplink (25) whether a communication quality of the first uplink (25) is acceptable; and

means for determining to execute the countermeasure, if the first uplink (25) is subject to a Rayleigh fading dip and the communication quality of the first uplink (25) is not acceptable.

45. A method according any one of the claims 33 to 41, or 44, wherein the means for determining of whether to execute the countermeasure includes:

means for obtaining a quality estimate (Q2) of the first downlink (27);

means for determining in dependence of the quality estimate (Q2) of the first downlink (27) whether a communication quality of the first downlink (27) is acceptable; and

means for determining to execute the countermeasure, if the first downlink (27) is subject to a Rayleigh fading dip and the communication quality of the first downlink (27) is not acceptable.

46. An apparatus according to any one of the claims 33 to 41, or 45, wherein the means for determining whether to execute the countermeasure includes:

5 means for obtaining a quality estimate (Q1) of the first uplink (25);

means for determining in dependence of the quality estimate (Q1) of the first uplink (25) whether a communication quality of the first uplink (25) is acceptable;

10 means for determining when information is sent over the first uplink (25); and

means for determining to execute the countermeasure, if information is sent over the first uplink (25) while the first uplink (25) is subject to a Rayleigh fading dip and the
15 communication quality of the first uplink (25) is not acceptable.

47. An apparatus according to any one of the claims 33 to 41, 44 or 46, wherein the means for determining whether to execute the
20 countermeasure includes:

means for obtaining a quality estimate (Q2) of the first downlink (27);

means for determining in dependence of the quality estimate (Q2) of the first downlink (27) whether a communication quality
25 of the first downlink (27) is acceptable;

means for determining when information is sent over the first downlink (27); and

means for determining to execute the countermeasure, if information is sent over the first downlink (27) while the first
30 downlink (27) is subject to a Rayleigh fading dip and the communication quality of the first downlink (27) is not acceptable.

48. An apparatus according to any one of the claims 33, 42 or
35 43, wherein the means for determining whether to execute the

countermeasure includes means for determining to execute the countermeasure, if it is determined that the first uplink (25) is subject to a Rayleigh fading dip.

- 5 49. An apparatus according any one of the claims 33, 42, 43 or 48, wherein the means for determining whether to execute the countermeasure includes means for determining to execute the countermeasure, if it is determined that the first downlink (27) is subject to a Rayleigh fading dip.

10

50. An apparatus according to any one of the claims 33 to 49, wherein the means for determining whether to execute a countermeasure includes means for determining whether to perform a handoff from the first radio channel (23).

15

51. An apparatus according claim 50, wherein the apparatus further comprises:

means for selecting a new channel to which handoff is to be performed, if it is determined to perform a handoff from the first radio channel (23); and

20

means for initiating the handoff from the first radio channel (23) to the new channel.

52. An apparatus according to claim 51, wherein the means for selecting includes:

25

means for determining a set of channels which are available for handoff; and

means for selecting the new channel from the set of channels.

30

53. An apparatus according to claim 52, wherein the means for determining the set of channels includes means for determining the set of channels to include at least one channel associated with the first radio base station (RBS1).

35

54. An apparatus according to any one of the claims 52 or 53, wherein the cellular radio communication system includes at least a second radio base station having essentially the same location as the first radio base station, and wherein the means
5 for determining the set of channels includes means for determining the set of channels to include at least one channel associated with the second radio base station.

55. An apparatus according to any one of the claims 52, 53 or
10 54, wherein the means selecting the new channel from the set of channels includes means for selecting from the set of channels the channel having an uplink using a carrier frequency which differs the most from the carrier frequency of the first uplink
(25) without being essentially an integer multiple of the
15 carrier frequency of the first uplink (25), if the first uplink (25) is subject to a Rayleigh fading dip.

56. An apparatus according any one of the claims 52, 53 or 54, wherein the means for selecting the new channel from the set of
20 channels includes means for selecting from the set of channels the channel having a downlink using a carrier frequency which differs the most from the carrier frequency of the first downlink (27) without being essentially an integer multiple of the carrier frequency of the first downlink (27), if the first
25 downlink (27) is subject to a Rayleigh fading dip.

57. An apparatus according to any one of the claims 33 to 49, wherein the means for determining whether to execute a countermeasure includes means for determining whether to switch
30 a transmitting antenna (11a,11b).

58. An apparatus for determining whether one of a first uplink (25) or first downlink (27) of a first radio channel (23) is subject to a Rayleigh fading dip, the first radio channel (23)
35 being used during a current communication segment for

communications between a first radio base station (RBS1) and a first radio terminal (T1), the apparatus **characterised** in that it comprises:

- means for obtaining a gain of the first uplink (25);
- 5 means for obtaining a gain of the first downlink (27); and
- means for comparing the gain of the first uplink (25) to the gain of the first downlink (27) in order to deduce whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip.

10

59. An apparatus according to claim 58, wherein the means for comparing includes:

- means for determining an offset (F) associated with a difference between the gain of the first uplink (25) and the
- 15 gain of the first downlink (27) during the current communication segment; and

- means for determining whether one of the first uplink (25) or the first downlink (27) is subject to a Rayleigh fading dip by monitoring how the difference between the gain of the first
- 20 uplink (25) and the gain the first downlink (27) deviates from the offset (F).

60. An apparatus according to claim 59, wherein the means for determining the offset (F) includes means for determining the

25 ~~offset (F) by establishing an average value of the difference~~ between the gain of the first uplink (25) and the gain of the first downlink (27) during the current communication segment.

61. An apparatus according to claim 60, wherein the apparatus

30 further comprises:

- means for generating an initiation value for use as a starting point when establishing the average value in order to reduce a convergence time of the establishing of the average value.

35

62. An apparatus according to claim 61, wherein the means for generating of the initiation value includes means for generating the initiation value (F1) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during all communications performed over the first radio channel (23) from a selected point in time which precedes the current communication segment.

63. An apparatus according to claim 61, wherein the means for generating of the initiation value includes means for generating the initiation value (F11) by averaging the difference between the gain of the first uplink (25) and the gain of the first downlink (27) during communications performed over the first radio channel (23) between the first radio base station (RBS1) and radio terminals of the same type as the first radio terminal (T1).

64. An apparatus according to any one of claims 59 to 63, wherein the means for monitoring includes:

means for determining that the first downlink (27) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) exceeds the offset (F) by more than a first predetermined value; and

means for determining that the first uplink (25) is subject to a Rayleigh fading dip, if the difference between the gain of the first uplink (25) and the gain of the first downlink (27) falls below the offset (F) by more than a second predetermined value.

ABSTRACT

The present invention pertains to the field of methods and apparatuses relating to radio communication; and in particular to the part of this field that concerns cellular radio communication. The present invention addresses mainly the problem of improving reliability and communication quality in a cellular radio communication system (1). According to the invention, it is determined whether one of an uplink (25) or a downlink (25) of a radio channel (23) is subject to a Rayleigh fading dip. If it is determined that one of the uplink (25) or the downlink (27) is subject to a Rayleigh fading dip, it is then determined whether it is necessary to execute a countermeasure in order to avoid the negative influences of Rayleigh fading on the channel (23). The invention is not limited to improving conditions on one channel but may be employed to any number of channels used for communications in the cellular radio communication system (1).

Figure of publication: Figure 1



1/5

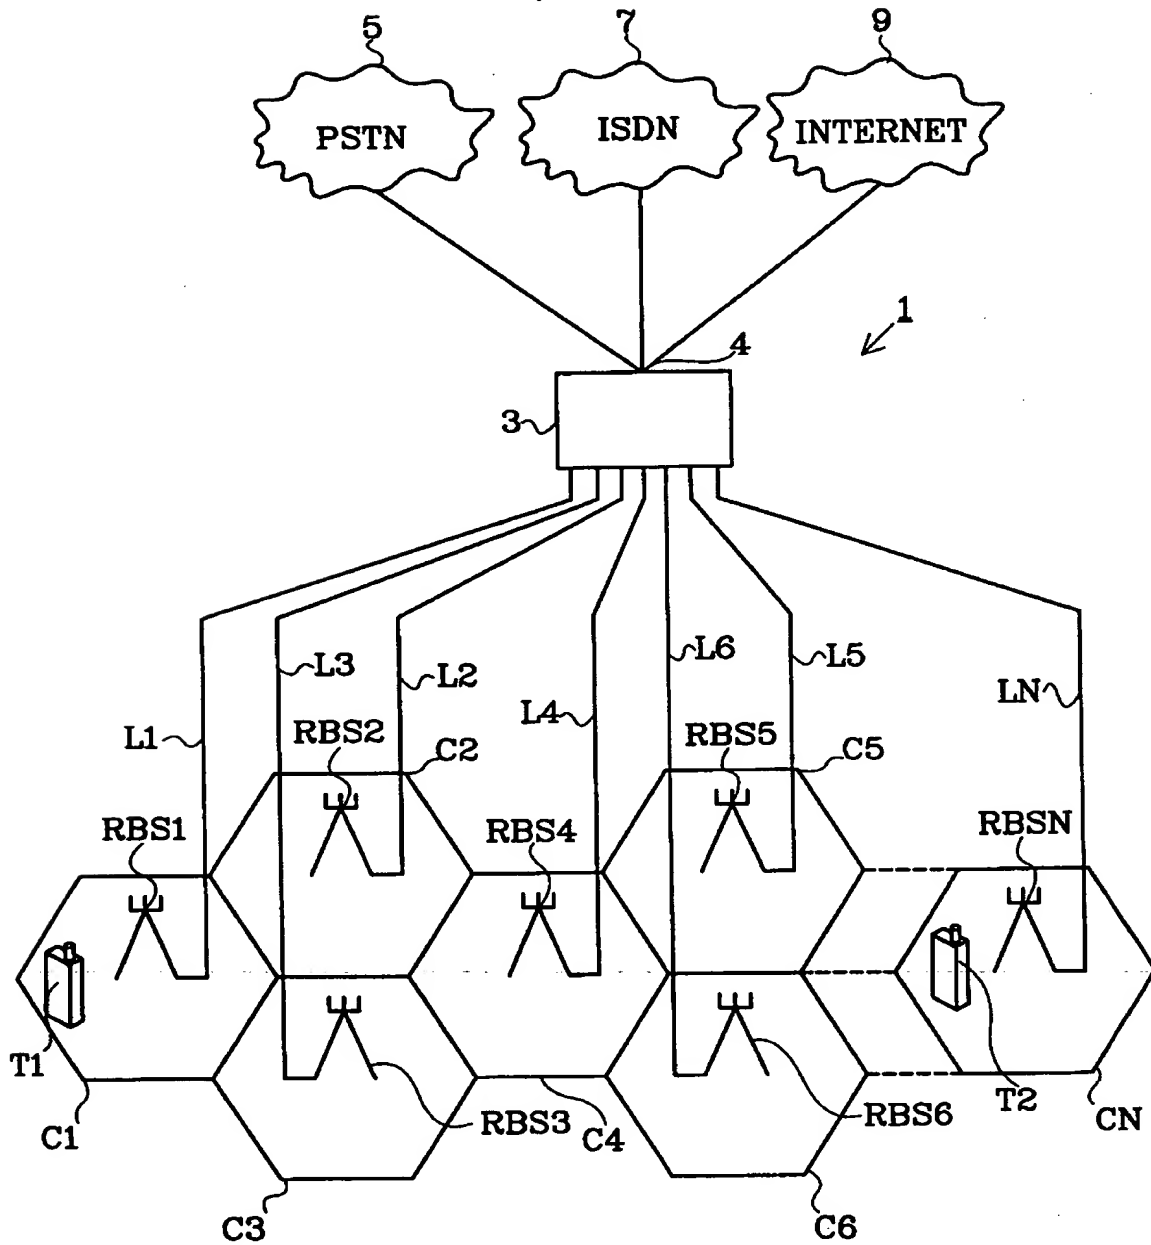


FIG. 1

2/5

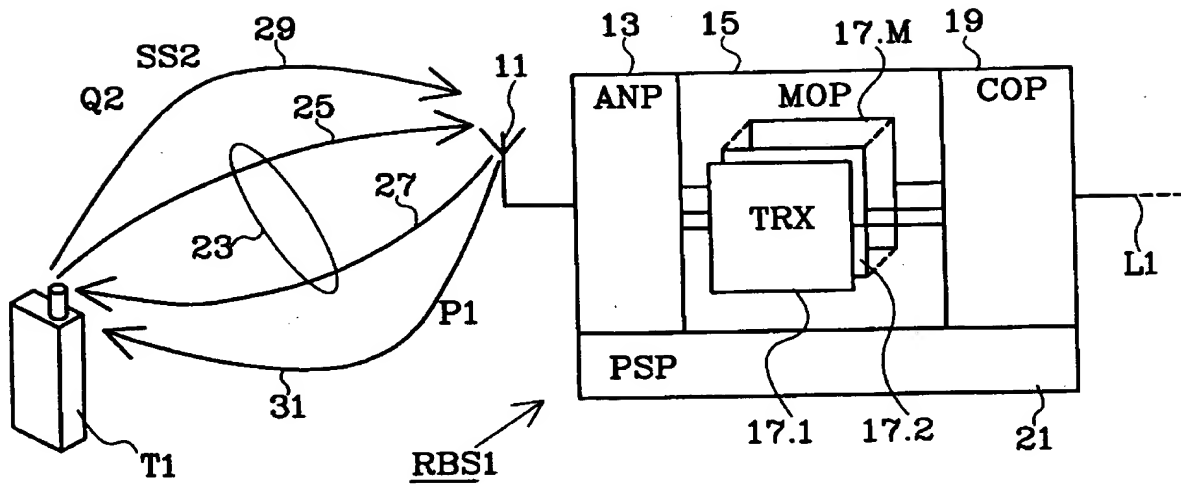


FIG. 2

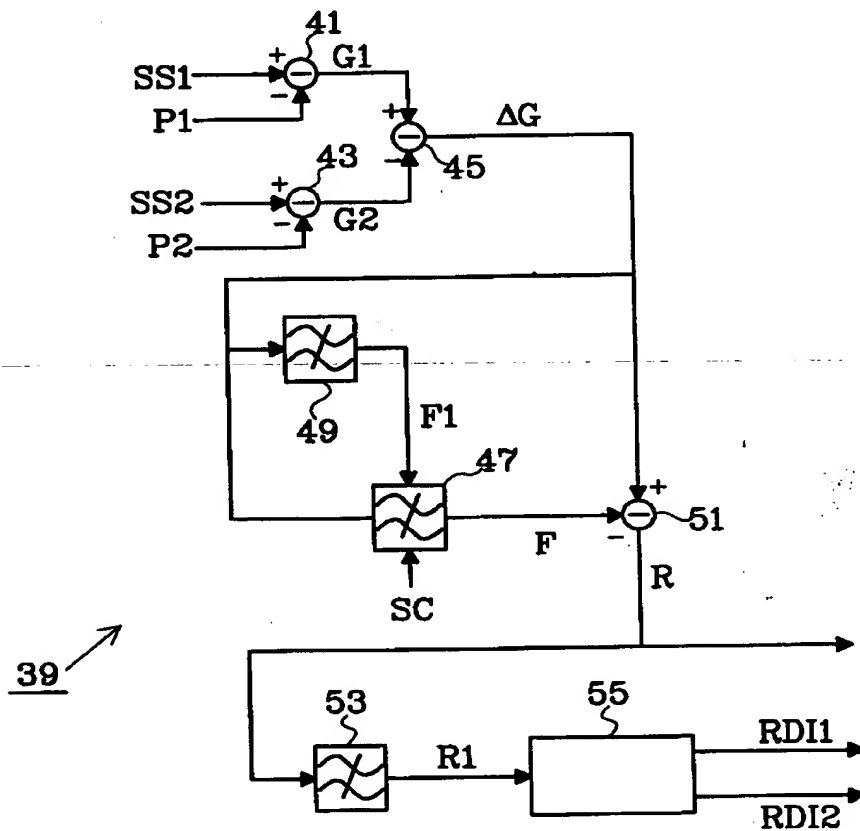


FIG. 3

3/5

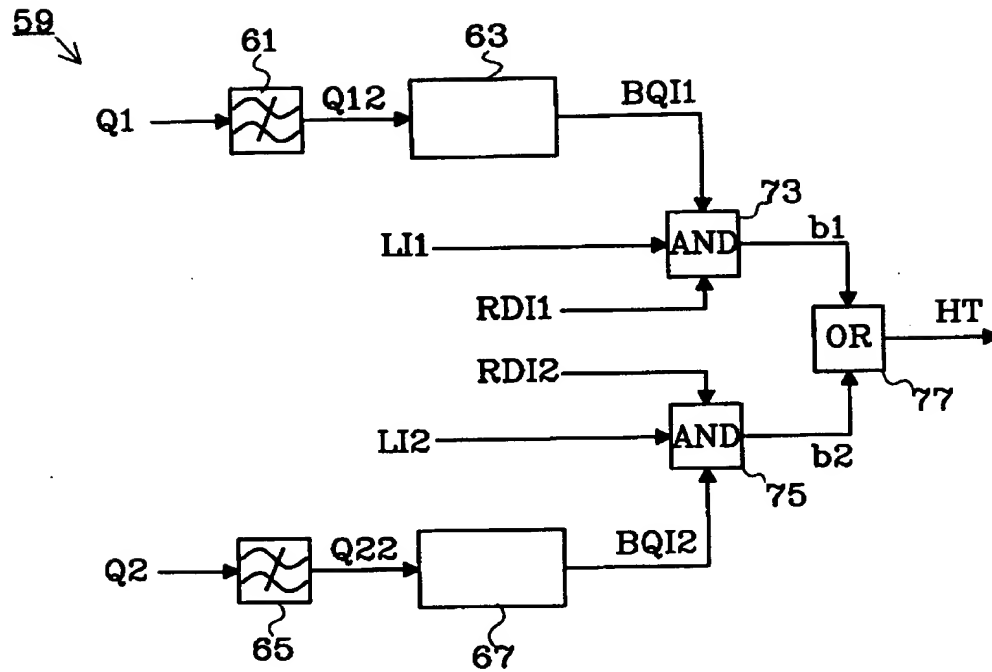


FIG. 4


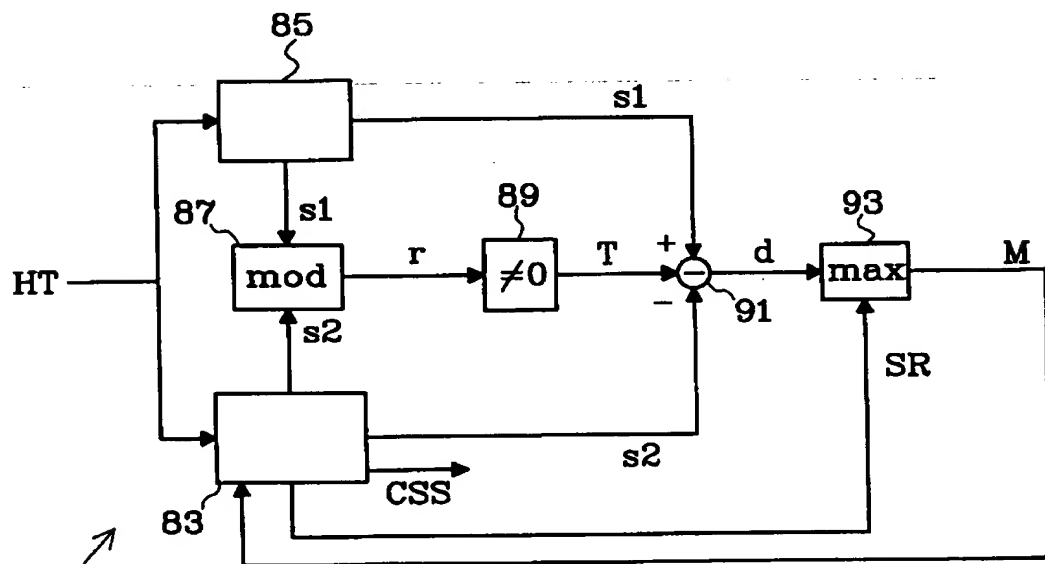



FIG. 5

FIG. 6

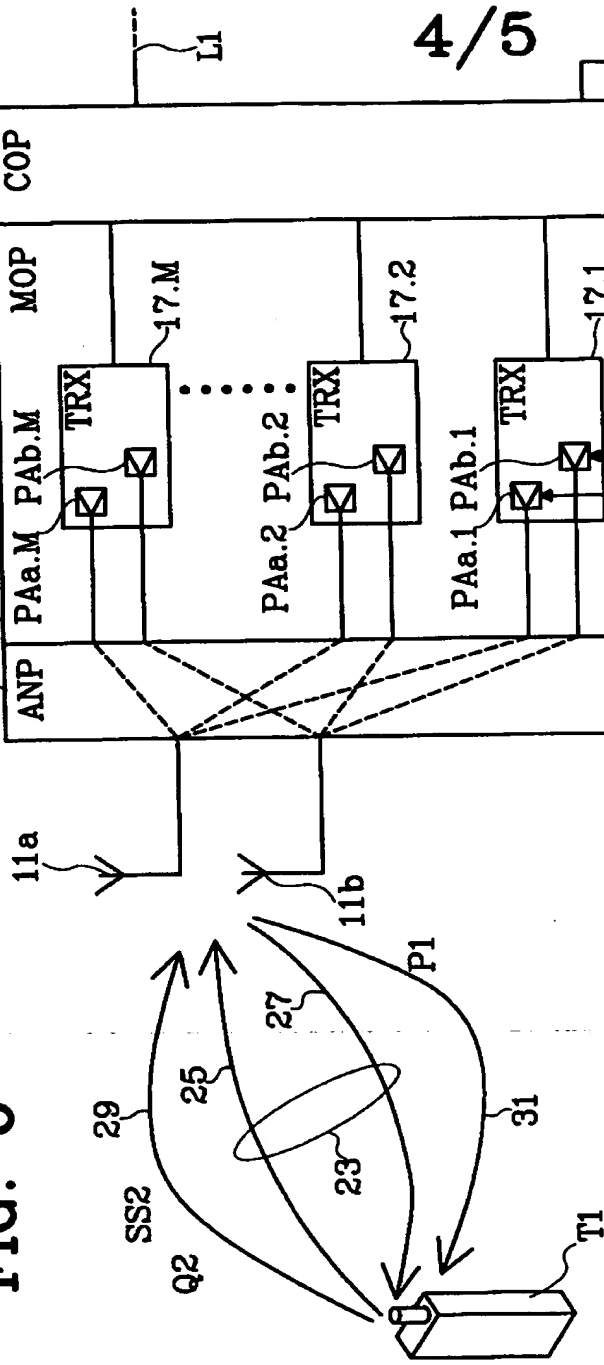

4/5

FIG. 7

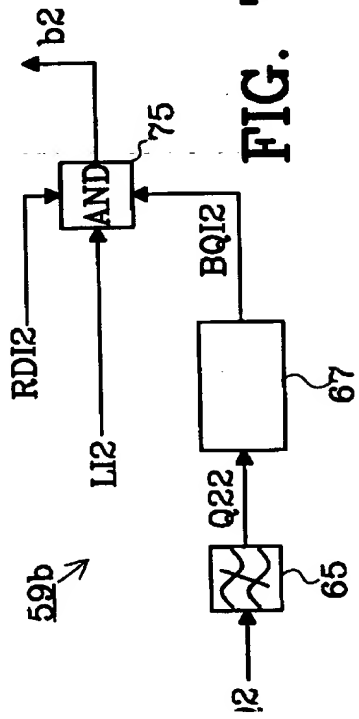

RBS1

FIG. 7

5/5

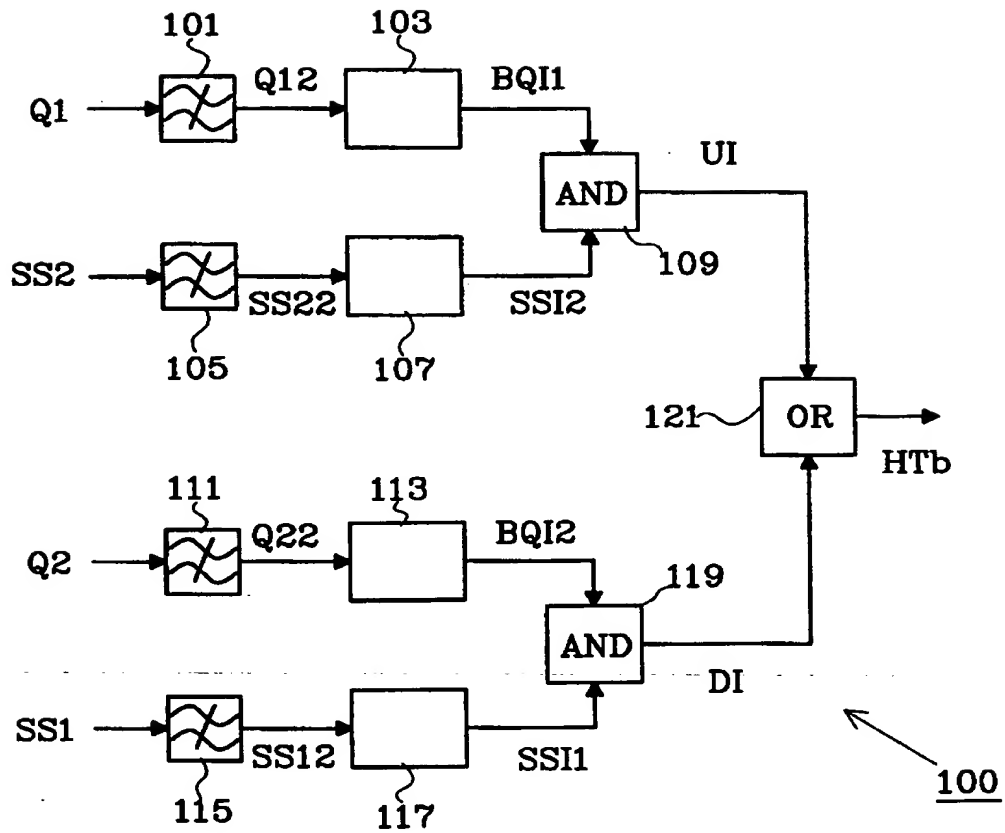


FIG. 8